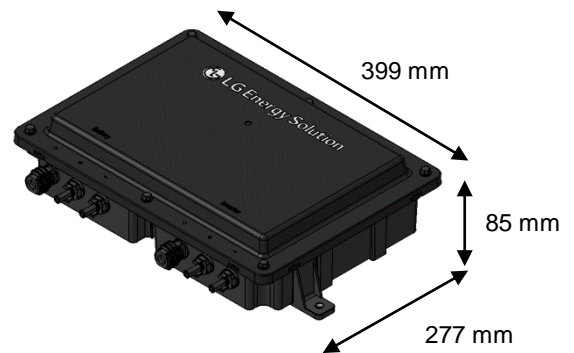


3Phase Box

Ver 1.0

Electrical Characteristics	
Max input voltage	1000 V _{DC}
Current (Max current)	20A (31.5A for 10sec)
Self consumption	3.5 W
DC Protection	Mechanical contactor, Fuse
Connection Method	Plug Type Connector
User interface	LEDs for Normal and Fault operation
Operating Conditions	
Installation Location	Indoor / Outdoor
Operating Temperature	-20 ~ 50°C
Humidity	5% ~ 95%
Altitude	Max. 6,562ft (2,000m)
Cooling Strategy	Natural Convection
Certification	
Safety	IEC 62109-1
Ingress Rating	IP55
Mechanical Characteristics	
Dimensions (W x H x D)	399 x 85 x 277mm
Weight	2.5 kg


Available Install Combination

- 10H Prime, 16H Prime
- enblock S



HQ: Parc-1 LG Energy Solution, 108, Yeoui-daero, Yeongdeungpo-gu, Seoul, 07335,
Korea

<http://www.lghomebattery.com> <http://www.lgensol.com>